


Low Voltage Fuses (LV Fuses)

LFR38-xA10-y (-I) Series

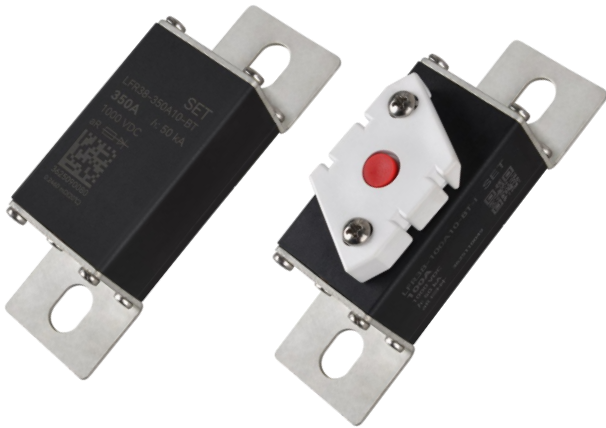

Key Features

- Rated Voltage: 1000 VDC
- Breaking Capacity: 50 kA (L/R=10 ~ 15 ms)
- Fusing Characteristics: High Speed Fuse
- Utilization Category: aR
- Good Current Limiting Capability
- Body Size: 75 x 38 x 41.5 mm, 75 x 38 x 39 mm
- Indicator Optional
- RoHS and REACH Compliant, Pb-free

Applications



- Energy Storage System (ESS)
- DC systems
- Variable-frequency Drive (VFD)
- Inverter
- Direct Current Charging Pile

Agency Information



Rated Current I_n (A)	Agency Symbol	Standards	The File No. and certification No. obtained by SETsafe SETfuse	Utilization Category
100 ~ 400		GB/T 13539.4	2026010308840275	aR
		EN 60269-4	B 107221 0015	aR
		EN 60269-4	N8A 107221 0016	aR

Dimensions (mm)

Mounting: BT (Bolt Terminal)

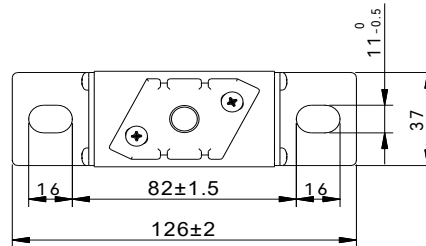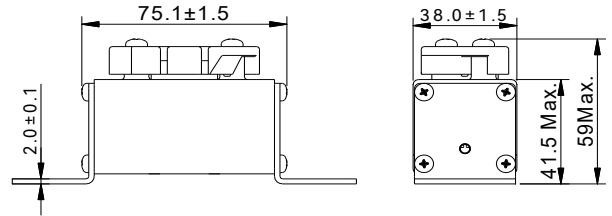


Mounting: FB (Flat Bolt Terminal)

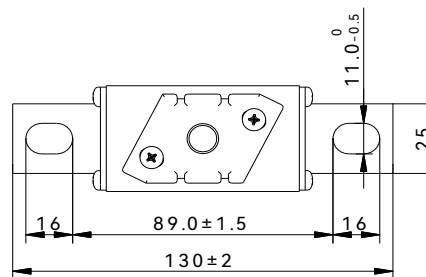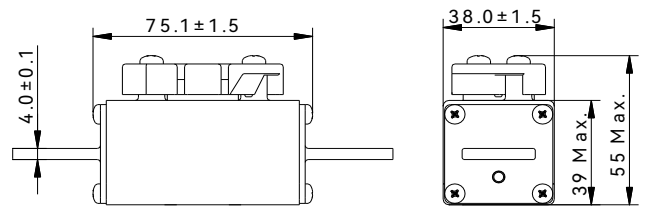




Part Numbering System

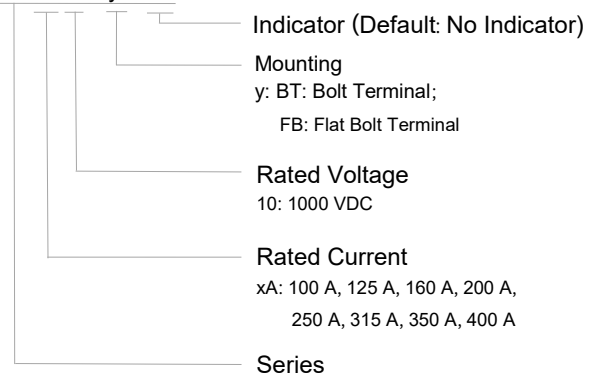LFR38 - xA10 - y (-I)




Specifications

Model	Rated Current I_n	Rated Voltage U_n	Rated Breaking Capacity I_1				RoHS REACH Pb-free
	(A)	(VDC)	(kA)	CCC	TUV	CE	
LFR38-100A10-BT/FB	100	1000	50	●	●	●	●
LFR38-125A10-BT/FB	125	1000	50	●	●	●	●
LFR38-160A10-BT/FB	160	1000	50	●	●	●	●
LFR38-200A10-BT/FB	200	1000	50	●	●	●	●
LFR38-250A10-BT/FB	250	1000	50	●	●	●	●
LFR38-315A10-BT/FB	315	1000	50	●	●	●	●
LFR38-350A10-BT/FB	350	1000	50	●	●	●	●
LFR38-400A10-BT/FB	400	1000	50	●	●	●	●

Note: 1. "○": ongoing; "●": RoHS and REACH Compliant, Pb Free.
 2. Installation of M10 bolts and nuts, recommended torque 21 N·m.

Time-Current Characteristics (For Reference Only)

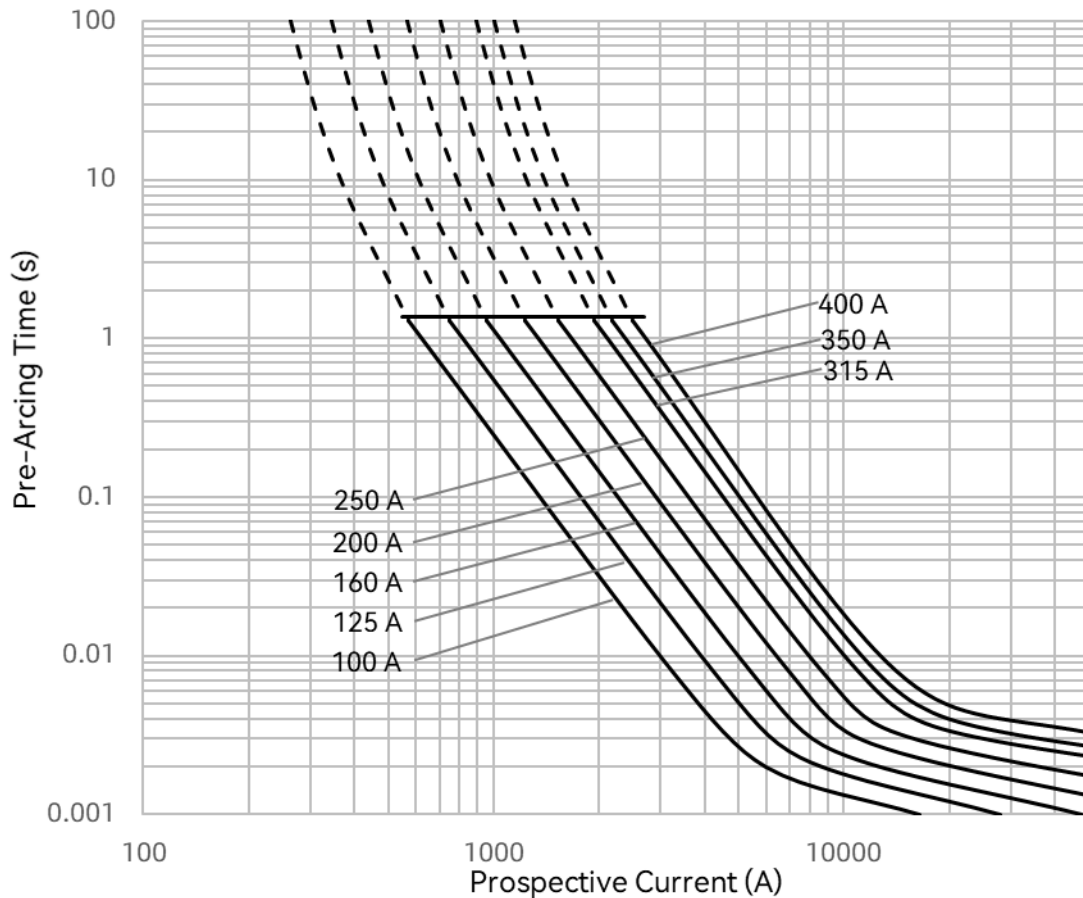


Packaging


Item	Pearl Cotton Pallet		Carton
Product Quantity (PCS)	8		32
Product Weight (g)	With Indicator: 290 x (1±10%) Without Indicator: 260 x (1±10%)	Gross Weight (kg)	With Indicator: 10.3 x (1±10%) Without Indicator: 9.3 x (1±10%)

Packaging Drawing:

Unit: mm

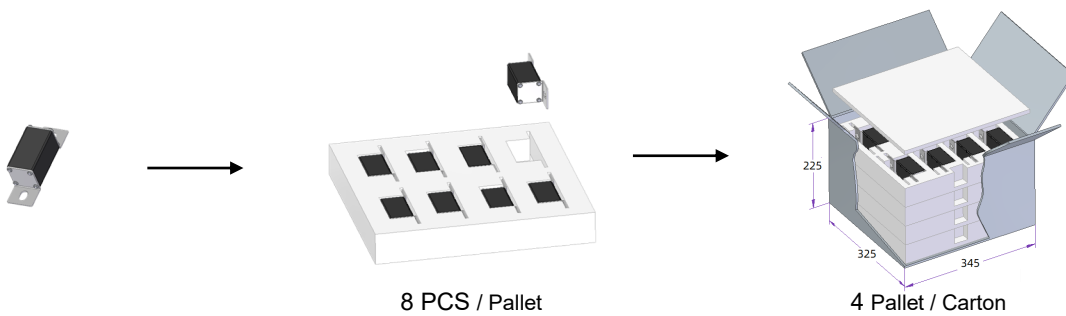


Power Dissipation Curve (For Reference Only)

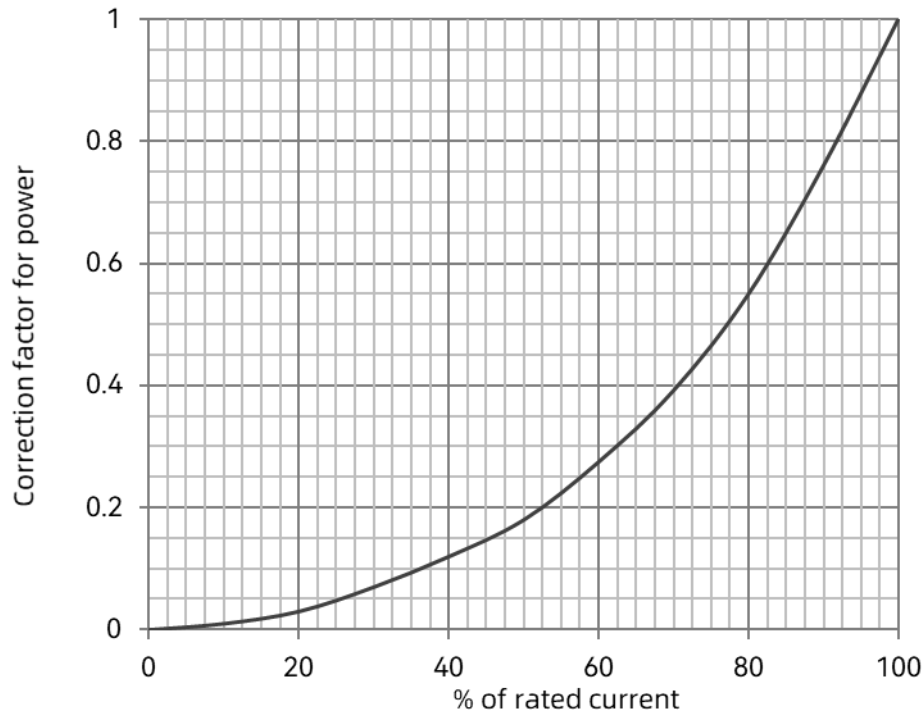


Rated Current Derating Curve

Ambient Temperature (For Reference Only)

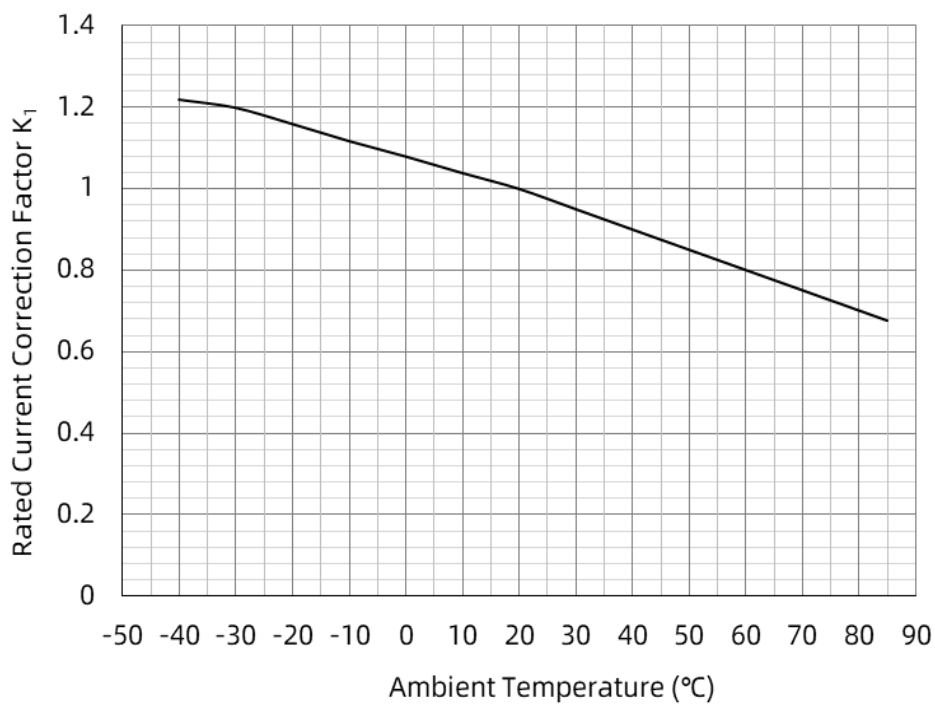


Connecting Conductor (For Reference Only)

The current density of copper bar for fuse installation is suggested to be 1.3 A/mm². If the carrying current density of copper bar is greater than 1.3 A/mm², it is recommended to reduce the rated current of fuse appropriately.

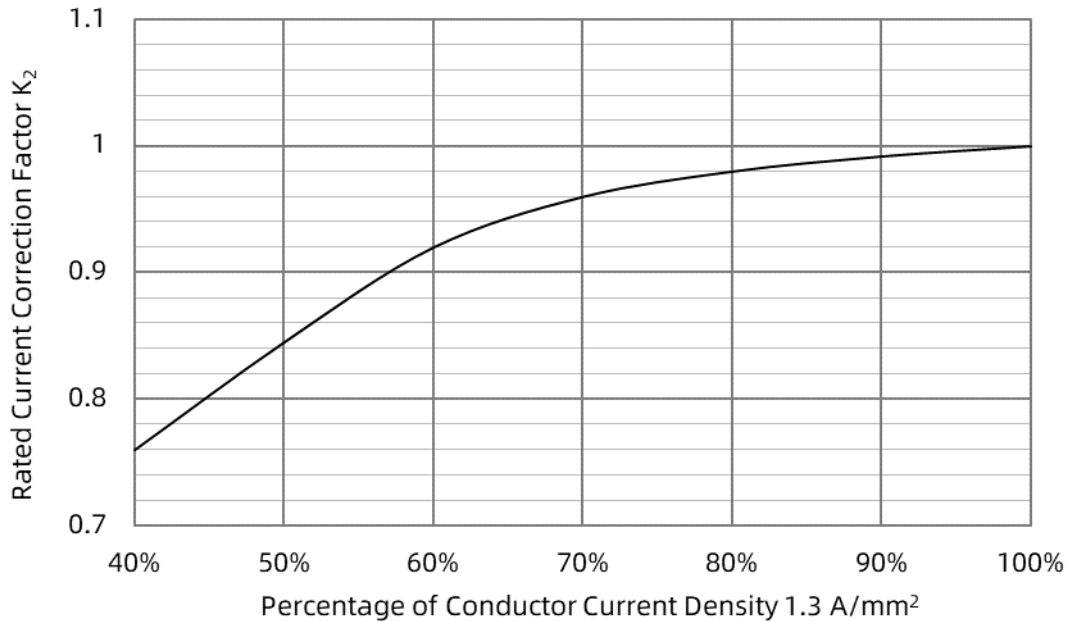

Cooling Air (For Reference Only)

When the fuse operates in the environment with cooling air, the rated current value of the fuse needs to be corrected.

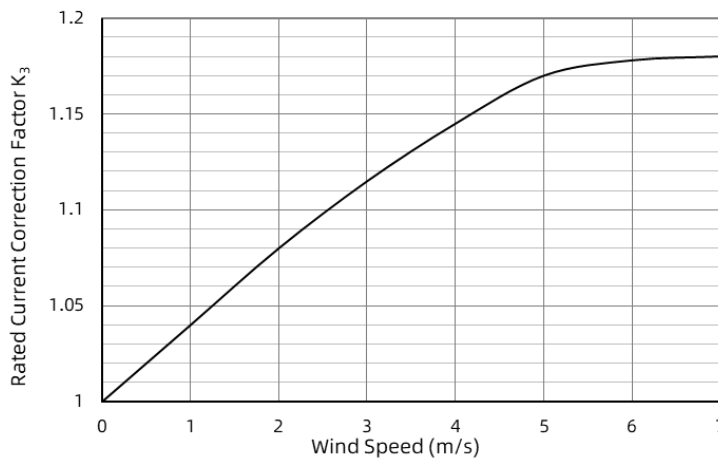

Altitude (For Reference Only)

Altitude (m)	Rated Current Correction Factor K_4
< 2000	1.000
2500	0.975
3000	0.950
3500	0.925
4000	0.900
4500	0.875
5000	0.850

When the altitude exceeds 2000 meters, use this formula to calculate the correction factor: $K_4 = (1 - \frac{h-2000}{100} \times 0.005)$
 (h is the actual altitude)

Rated Current:

$$I_n \geq \frac{K_0 I_c}{K_1 K_2 K_3 K_4 K_5}$$

I_c — Long-term continuous operating current

K_1 — Ambient temperature correction factor

K_3 — Cooling air correction factor

K_5 — Closed environment correction factor, for the better heat dissipation conditions of the box to take 0.9 ~ 0.95, while for the poorer take 0.8

K_0 — Reliability factor: 1.2 (Reference DL/T 5044-2014)

K_2 — Correction factor for connecting conductors

K_4 — Altitude correction factor



注意

Replacement

The fuse is a non-resettable product, for safety reasons, Please ensure that the spare fuse is same model.

Installation Position

Do not install the fuse in locations where severe vibrations may frequently occur, or where corrosive gases such as ammonia (NH₃), sulfur dioxide (SO₂), chlorine (Cl₂) and others (including acidic, alkaline, strongly oxidizing and sulfur-containing types) are present, or where organic solvents such as acetone, benzene, ethyl acetate, chloroform and others (including strongly polar solvents, esters, halogenated hydrocarbons and strongly oxidizing solvents) exist.

Transportation

During packaging and transportation, rain and snow and mechanical damage shall be avoided.

Storage Conditions and Effective Date

- Storage temperature: -10 °C ~ 40 °C.
- Storage humidity: ≤ 75%RH.
- Store in a sealed place without direct sunlight, pollution corrosive gases (NH₃, SO₂, Cl₂, etc.), or organic solvents (acetone, benzene, ethyl acetate, chloroform, etc.).
- Validity period: 12 consecutive months after you receive it.

Glossary

Item	Description
Fuse	Device that by the fusing of one or more of its specially designed and proportioned components opens the circuit in which it is inserted by breaking the current when this exceeds a given value for a sufficient time. —(IEC 60269-1)
Rated Current of a fuse-link I_n	Value of current that fuse-link can carry continuously without deterioration under specified conditions. —(IEC 60269-1)
Prospective Current (of a circuit and with respect to a fuse)	Current that would flow in the circuit if each pole of the fuse were replaced by conductor of negligible impedance. —(IEC 60269-1)
Rated Voltage U_n	A maximum open circuit voltage in which a fuse can be used, yet safely interrupt an overcurrent. Exceeding the voltage rating of a fuse impairs its ability to clear an overload or short circuit safely. —(IEC 60269-1)
Ampere Squared Seconds I^2t	The melting, arcing, or clearing integral of a fuse, termed I^2t , is the thermal energy required to melt, arc, or clear a specific current. It can be expressed as melting I^2t , arcing I^2t or the sum of them, clearing I^2t . —(IEC 60269-1)
Time-current Characteristics	Current giving the time, e.g. pre-arcing time or operating time as a function of the prospective current under stated conditions of operation. —(IEC 60269-1)
Breaking Capacity	Value of prospective current that a fuse is capable of breaking at a stated voltage under prescribed conditions of use and behavior. —(IEC 60269-1)
Breaking Range	Breaking range is a range of prospective currents within which the breaking capacity of a fuse-link is assured. —(IEC 60269-1)
Pre-arcing Time / Melting Time	Interval of time between the beginning of a current large enough to cause a break in the fuse-element(s) and the instant when an arc is initiated. —(IEC 60269-1)
Arcing Time	Interval of time between the instant of the initiation of the arc in a fuse and the instant of final arc extinction in that fuse. —(IEC 60269-1)
Operating Time / Total Clearing Time	Sum of the pre-arcing time and the acting time. —(IEC 60269-1)
Power Dissipation (in a fuse-link)	Power released in a fuse-link carrying a stated value of electric current under prescribed conditions of use and behavior. —(IEC 60269-1)
Correction Factor of Rated Current	When the application environment and working conditions exceed in the conditions specified in the standard, for the purpose of matching the working current and long service life of the fuse, the rating of fuse should be corrected by a correction factor. Consult the fuse manufacturer for specific application recommendations. —(IEC 60269-1)
Cut-off Current	Maximum instantaneous value reached by the current during the breaking operation of a fuse-link when it operates in such a manner as to prevent the current from reaching the otherwise attainable maximum. —(IEC 60269-1)
Cut-off Current Characteristic/ Let-through Current Characteristic	Curve giving the cut-off current as a function of the prospective current under stated conditions of operation. —(IEC 60269-1)