

Agency Information

The certificate is only used for browsing on the web and proves that SETsafe | SETfuse has been certified.

If you need a FULL-VERSION certificate, please contact us: sales@SETfuse.com

该证书只用于在网页浏览，证明SETsafe | SETfuse已获得认证，如需要完整版本证书，请联系我们: sales@SETfuse.com



PRODUCT CERTIFICATION

CERTIFICATE NO.: CQC21001292475

Valid from: Apr.20,2021

Valid until:long-term

NAME AND REGISTERED ADDRESS OF THE APPLICANT Xiamen' SET Electronics Co.,Ltd
NO.8067 West Xiang' An Rd,Torch High-tech industrial District,Xianmen

NAME AND REGISTERED ADDRESS OF THE MANUFACTURER Xiamen' SET Electronics Co.,Ltd
NO.8067 West Xiang' An Rd,Torch High-tech industrial District,Xianmen

NAME AND LOCATION OF THE FACTORY Xiamen' SET Electronics Co.,Ltd
NO.8001 West Xiang' An Rd,Torch High-tech industrial District,Xianmen

PRODUCT NAME, MODEL AND SPECIFICATION Metal Oxide Varistor
See Appendix

THE STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS GB/T 10193-1997;GB/T 10194-1997;GB 4943.1-2011;GB 8898-2011

TYPE OF CERTIFICATION SCHEMES Type Testing of Product + Follow up Factory Inspection

This is to certify that the above mentioned product(s) complies with the requirements of certification rules of CQC11-471551-2015.
The validity of the certificate is subject to positive result of the regular follow up inspection by issuing certification body.

The certificate information is available through the QR code below or CNCA's website: www.cnca.gov.cn



SIGNATURE:



CHINA QUALITY CERTIFICATION CENTRE



PRODUCT CERTIFICATION

CERTIFICATE NO. : CQC21001292475

page 1 of 2

paper:

This certificate and attachments shall be used at the same time, and the verification instructions can be found in the main certificate.

MOV14D(820~122)KM、SFV14D(820~122)KM 压敏电压：82V~1200V；最大连续交流电压：50VAC~750VAC，压敏电压的允许偏差为 K：±10%；气候类别为 40/125/21；[型号为 MOV14D(820~181)KM、SFV14D(820~181)KM 的压敏电阻器仅适用于 GB/T 10193-1997，GB/T 10194-1997]

型号规格		压敏电压 (V)	最大连续交流电压 A-C _{r.m.s} (V)	标准
MOV14D820KM	SFV14D820KM	82	50	GB/T 10193-1997 GB/T 10194-1997
MOV14D101KM	SFV14D101KM	100	60	
MOV14D121KM	SFV14D121KM	120	75	
MOV14D151KM	SFV14D151KM	150	95	
MOV14D181KM	SFV14D181KM	180	115	
MOV14D201KM	SFV14D201KM	200	130	GB/T 10193-1997 GB/T 10194-1997 GB 4943.1-2011 GB 8898-2011
MOV14D221KM	SFV14D221KM	220	140	
MOV14D241KM	SFV14D241KM	240	150	
MOV14D271KM	SFV14D271KM	270	175	
MOV14D301KM	SFV14D301KM	300	190	
MOV14D331KM	SFV14D331KM	330	210	
MOV14D361KM	SFV14D361KM	360	230	
MOV14D391KM	SFV14D391KM	390	250	
MOV14D431KM	SFV14D431KM	430	275	
MOV14D471KM	SFV14D471KM	470	300	
MOV14D511KM	SFV14D511KM	510	320	
MOV14D561KM	SFV14D561KM	560	350	
MOV14D621KM	SFV14D621KM	620	385	
MOV14D681KM	SFV14D681KM	680	420	
MOV14D751KM	SFV14D751KM	750	460	
MOV14D821KM	SFV14D821KM	820	510	
MOV14D911KM	SFV14D911KM	910	550	
MOV14D951KM	SFV14D951KM	950	575	
MOV14D102KM	SFV14D102KM	1000	625	



CHINA QUALITY CERTIFICATION CENTRE



PRODUCT CERTIFICATION


CERTIFICATE NO. : CQC21001292475

page 2 of 2

paper:

This certificate and attachments shall be used at the same time, and the verification instructions can be found in the main certificate.

MOV14D112KM	SFV14D112KM	1100	680	
MOV14D122KM	SFV14D122KM	1200	750	

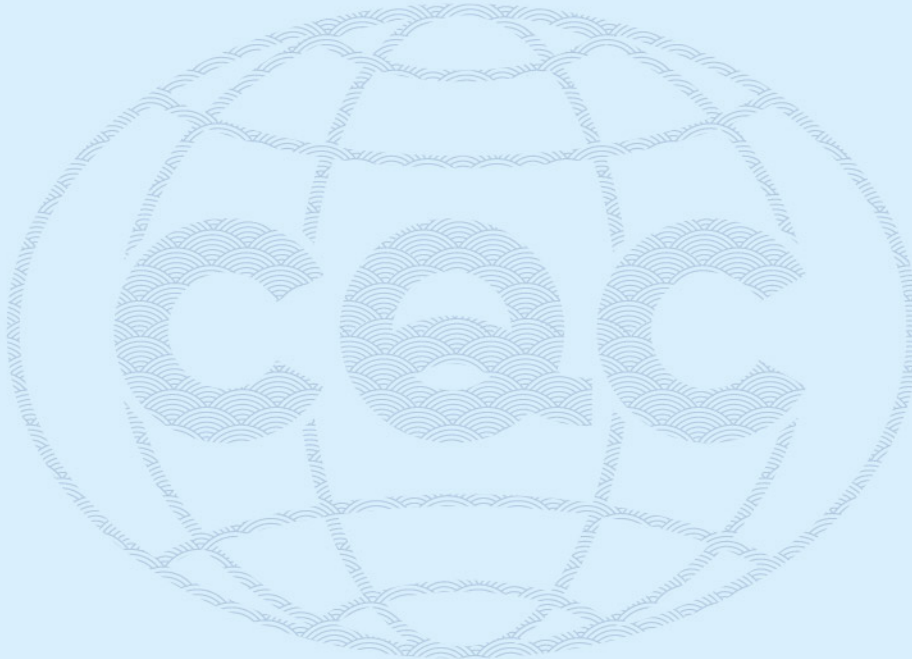

Annex



CHINA QUALITY CERTIFICATION CENTRE