


TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series


Description



Thermal Fuse & MOV (TFMOV) is a thermally protected varistor that has all the characteristics of a thermally protected varistor (MOV). TFMOV has all the characteristics of a varistor (MOV) with thermal protection, and there are two types of deterioration: natural deterioration due to long-term operation and deterioration due to an abnormal surge. When a surge occurs, the leakage current of the degraded MOV continues to increase, causing the surface temperature of the MOV to continue to rise and the possibility of fire. At this time, the thermal cutoff (fusible alloy) in the TFMOV senses the abnormal temperature and operates (blows) to disconnect the MOV from the main circuit to protect the entire circuit, and the MOV itself will not continue to heat up and catch fire.


SETsafe | SETfuse Thermal Protection Varistors - Fusible Alloy TFMOV40K Series are mainly composed of Varistors (MOV), Thermal Cutoffs (Fusible Alloy) (ATCO), Flame Retardant Cases and Metal Components (Pins), Potting Materials. Vertical mounting structure; Nominal discharge current: (30 ~ 40) kA; Maximum continuous operating voltage: (50~ 750) VAC; Safety certificates: UL, cUL; RoHS, REACH compliant.

Schematics

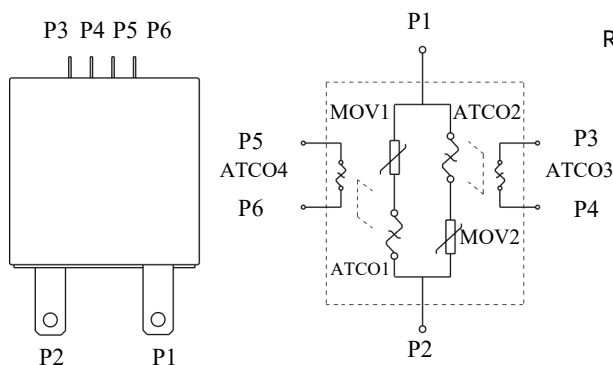

TFMOV(ATCO)

Structure

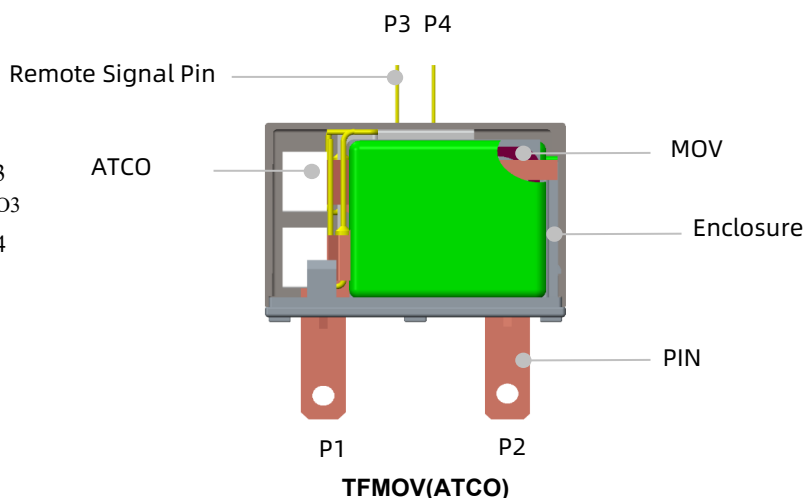

TFMOV(ATCO)

Features

- Thermal Protection, High Reliability
- Small Size
- Remote Signal Contact for Failure Indication (Optional)
- High Energy Capacity
- Epoxy Sealing Material, Flame-retardant to V0 (UL 94)
- Comply with UL 1449 / IEC 61643-11

Applications

- Telecom Equipment
- String Inverter in Photovoltaic System
- AC / DC Power Supply
- Uninterruptable Power Supply (UPS)
- Surge Protective Device (SPD)
- Electric Meter
- Power Distribution Unit (PDU)

TFMOV


Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Agency Approvals

Agency Symbol	Standards	The File No. and certification No. obtained by SETsafe SETfuse	Category
	UL 1449	E322662	Type 4CA
	CSA C22. 2 NO. 269, CSA ECN 516	E322662	Type 4CA
Environment	RoHS & REACH	Compliant	



Part Numbering System

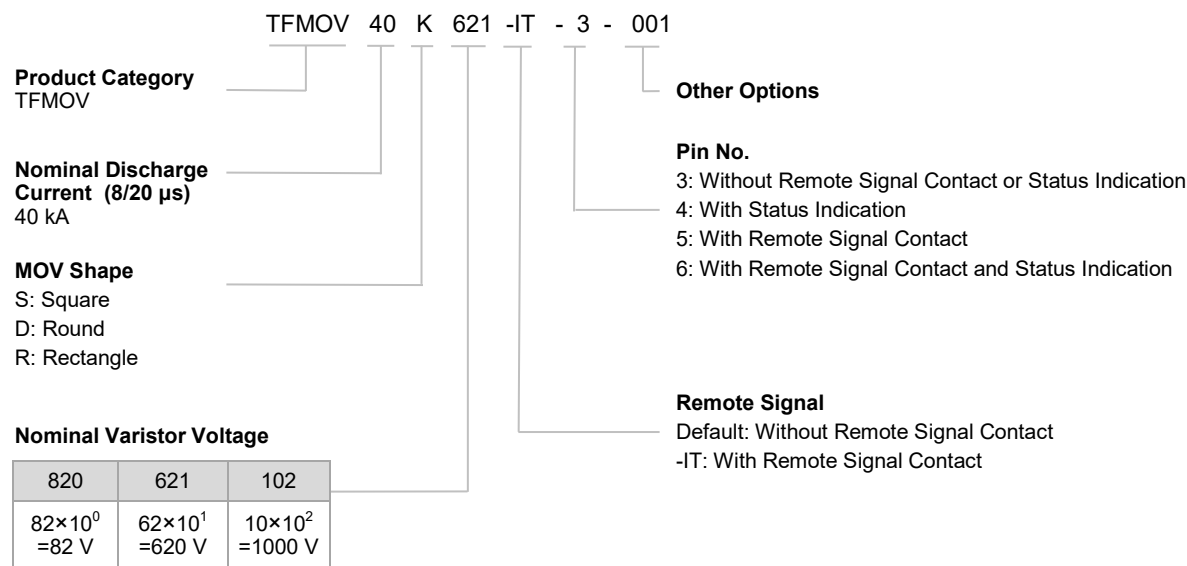

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

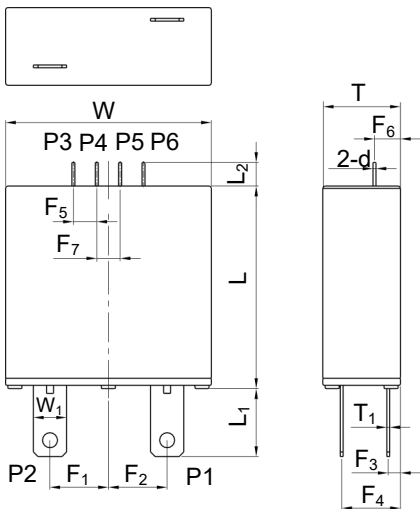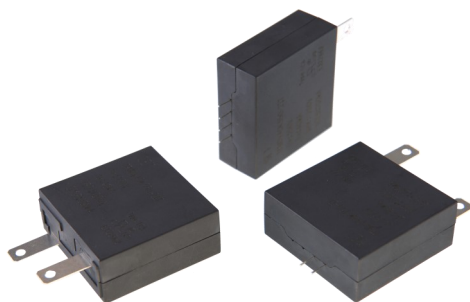

Note:
Pin P3 & P4 / P5 & P6 is optional.
Unit: mm

Nominal Varistor Voltage	L (±1.0)	L ₁ (±0.5)	L ₂ (±1.0)	W (±1.0)	W ₁ (±0.2)	T (±1.0)	T ₁ (±0.2)
40K820 ~ 201	42.7	14.5	5.0	44.0	7.1	12.6	0.6
40K221 ~ 471	42.7	14.5	5.0	44.0	7.1	14.6	0.6
40K511 ~ 621	42.7	14.5	5.0	44.0	7.1	16.5	0.6
40K681 ~ 821	42.7	14.5	5.0	44.0	7.1	18.5	0.6
40K911 ~ 122	42.7	14.5	5.0	44.0	7.1	23.0	0.6
Nominal Varistor Voltage	d (±0.05)	F ₁ (±0.3)	F ₂ (±0.3)	F ₃ (±0.5)	F ₄ (±0.5)	F ₅ (±0.5)	F ₆ (±0.5)
40K820 ~ 201	0.50	12.5	12.5	2.3	10.2	5.0	5.5
40K221 ~ 471	0.50	12.5	12.5	2.3	11.0	5.0	5.5
40K511 ~ 621	0.50	12.5	12.5	2.3	12.2	5.0	5.5
40K681 ~ 821	0.50	12.5	12.5	2.3	13.5	5.0	5.5
40K911 ~ 122	0.50	12.5	12.5	2.3	20.5	5.0	5.5
Model	L (±1.0)	L ₁ (±0.5)	L ₂ (±1.0)	W (±1.0)	W ₁ (±0.2)	T (±1.0)	T ₁ (±0.2)
TFMOV40K150x	42.7	14.5	5.0	44.0	7.1	14.6	0.6
TFMOV40K300x	42.7	14.5	5.0	44.0	7.1	14.6	0.6
TFMOV40K350x	42.7	14.5	5.0	44.0	7.1	16.5	0.6
TFMOV40K460x	42.7	14.5	5.0	44.0	7.1	18.5	0.6
TFMOV40K550x	42.7	14.5	5.0	44.0	7.1	18.5	0.6
Model	d (±0.05)	F ₁ (±0.3)	F ₂ (±0.3)	F ₃ (±0.5)	F ₄ (±0.5)	F ₅ (±0.5)	F ₆ (±0.5)
TFMOV40K150x	0.50	12.5	12.5	2.3	11.0	5.0	5.5
TFMOV40K300x	0.50	12.5	12.5	2.3	11.0	5.0	5.5
TFMOV40K350x	0.50	12.5	12.5	2.3	12.2	5.0	5.5
TFMOV40K460x	0.50	12.5	12.5	2.3	13.5	5.0	5.5
TFMOV40K550x	0.50	12.5	12.5	2.3	13.5	5.0	5.5

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Specifications

Model	Max. Continuous Operating Voltage		Varistor Voltage @1 mA DC		Clamping Voltage (Max.)		Nominal Discharge Current (8/20 μ s)	Max. Dis-charge Current (8/20 μ s)	Voltage Clamping Ratio ^a		Max. Energy (Joule)	Typical Capacitance (Reference)	UL SPD Type
	U_c		Min.	Max.	V_C	I_P	I_n	I_{max}	R_{cl}	I_n	10/1000 μ s	@1 kHz	UL 1449
	(VAC)	(VDC)	(V)		(V)	(A)	(kA)			(kA)	(J)	(pF)	
TFMOV40K820x*	50	65	74	90	135	150	30	60	3.2	30	312	37900	Type 4CA
TFMOV40K101x*	60	85	90	110	165	150	30	60	3.2	30	390	30000	Type 4CA
TFMOV40K121x*	75	100	108	132	200	150	30	60	3.2	30	470	24400	Type 4CA
TFMOV40K151x*	95	125	135	165	250	150	30	60	3.2	30	592	20000	Type 4CA
TFMOV40K181x*	115	150	162	198	300	150	30	60	2.3	30	700	16500	Type 4CA
TFMOV40K201x*	130	170	185	225	340	150	40	100	2.3	40	800	13500	Type 4CA
TFMOV40K221x*	140	180	198	242	360	150	40	100	2.3	40	900	12800	Type 4CA
TFMOV40K241x*	150	200	216	264	395	150	40	100	2.3	40	960	11300	Type 4CA
TFMOV40K271x*	175	225	243	297	455	150	40	100	2.3	40	1080	10200	Type 4CA
TFMOV40K301x*	190	250	270	330	500	150	40	100	2.3	40	1200	9020	Type 4CA
TFMOV40K331x*	210	275	297	363	550	150	40	100	2.3	40	1312	8300	Type 4CA
TFMOV40K361x*	230	300	324	396	595	150	40	100	2.3	40	1490	7500	Type 4CA
TFMOV40K391x*	250	320	351	429	650	150	40	100	2.3	40	1660	7000	Type 4CA
TFMOV40K431x*	275	350	387	473	710	150	40	100	2.3	40	1840	5900	Type 4CA
TFMOV40K471x*	300	385	423	517	775	150	40	100	2.3	40	2000	5760	Type 4CA
TFMOV40K511x*	320	415	459	561	845	150	40	100	2.3	40	2120	5300	Type 4CA
TFMOV40K561x*	350	460	504	616	925	150	40	100	2.3	40	2300	4900	Type 4CA
TFMOV40K621x*	385	505	558	682	1025	150	40	100	2.3	40	2500	4400	Type 4CA
TFMOV40K681x*	420	560	612	748	1120	150	40	80	2.3	40	2500	4000	Type 4CA
TFMOV40K751x*	460	615	675	825	1240	150	40	80	2.3	40	2560	3640	Type 4CA
TFMOV40K821x*	510	670	738	902	1355	150	40	80	2.3	40	2600	3600	Type 4CA
TFMOV40K911x*	550	745	819	1001	1500	150	40	80	2.3	40	2950	3000	Type 4CA
TFMOV40K102x*	625	825	900	1100	1650	150	40	80	2.3	40	3100	2700	Type 4CA
TFMOV40K112x*	680	895	990	1210	1815	150	40	80	2.3	40	3500	2460	Type 4CA
TFMOV40K122x*	750	1000	1080	1320	1980	150	40	80	2.3	40	4000	2270	Type 4CA

Notes:

a: $R_{cl} = \frac{V_C}{I_n}$, $U_p \geq V_C$, V_C : Clamping Voltage (@ I_n), V_N : Varistor Voltage, U_p : Voltage Protection Level.The Value of Voltage Protection Level (U_p) is determined according to IEC 61643-11:2011 clause 6.4.

Preferred values of voltage protection level (kV): 0.08, 0.09, 0.10, 0.12, 0.15, 0.22, 0.33, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.2, 1.5, 1.8, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0, 10.

*: Optional Remote Signal Function, -IT with One Remote Signal P3 & P4, -2IT with Two Remote Signal P3 & P4 and P5 & P6.

TFMOV


Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Model	Nominal System Voltage	Max. Continuous Operating Voltage	Nominal Discharge Current (8/20 μ s)	Max. Discharge Current (8/20 μ s)	Voltage Protection Rating	SCCR	UL SPD Type
	U_n	U_c	I_n	I_{max}	VPR (@6kV/3kA)		
	(VAC)	(VAC)	(kA)		(V)		
TFMOV40K150x	120	150	40	100	600	200	Type 1CA
TFMOV40K300x	220	300	40	100	900	200	Type 1CA
TFMOV40K350x	277	350	40	100	1200	200	Type 1CA
TFMOV40K460x	347	460	40	80	1500	150	Type 1CA
TFMOV40K550x	480	550	40	80	1500	150	Type 1CA

Performance Curve for Reference


Limited Current Test Curve (UL 1449 clause 44.4)

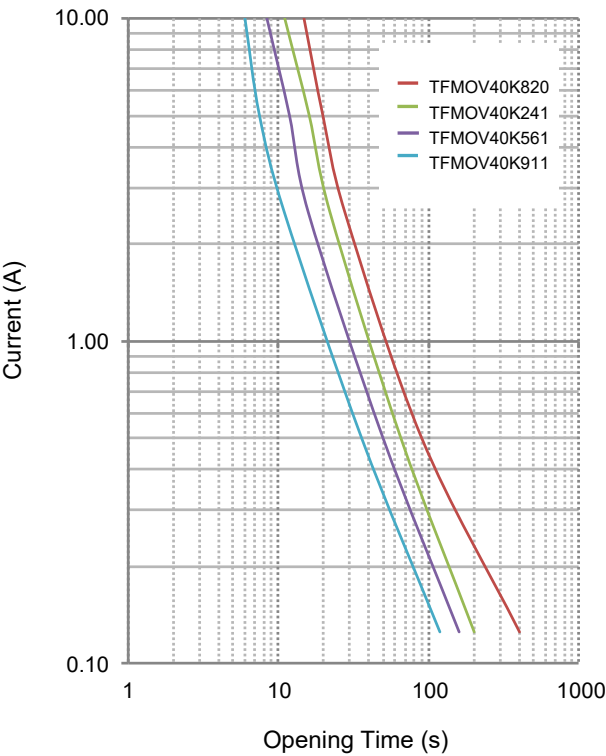

Note:
The limited current test curve is for reference only.

Max. Peak Current Derating Curve

TFMOV40K201x to TFMOV40K122x

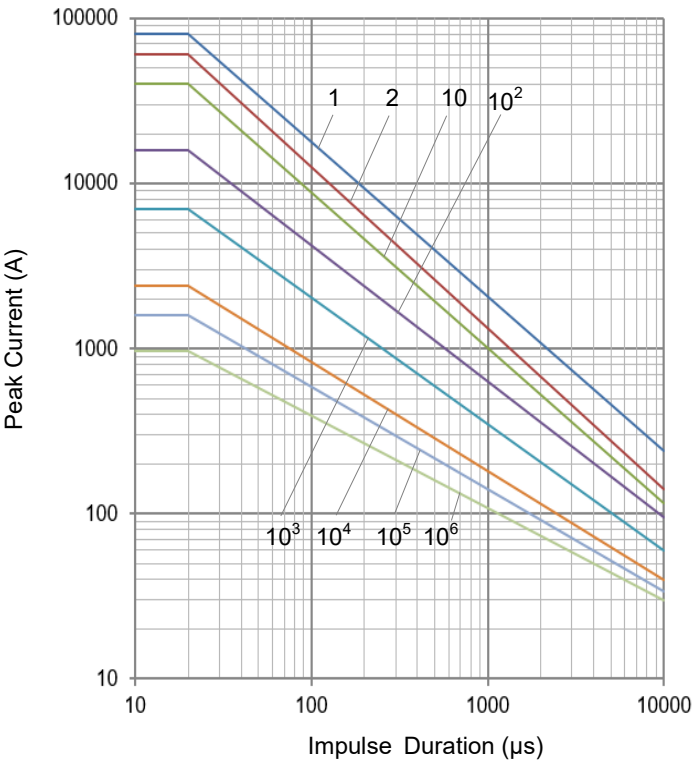



Note:
1, 2, 10, 10², 10³, 10⁴, 10⁵, 10⁶ Stand for number of repetitions.

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series


Voltage-Current Characteristic Curves

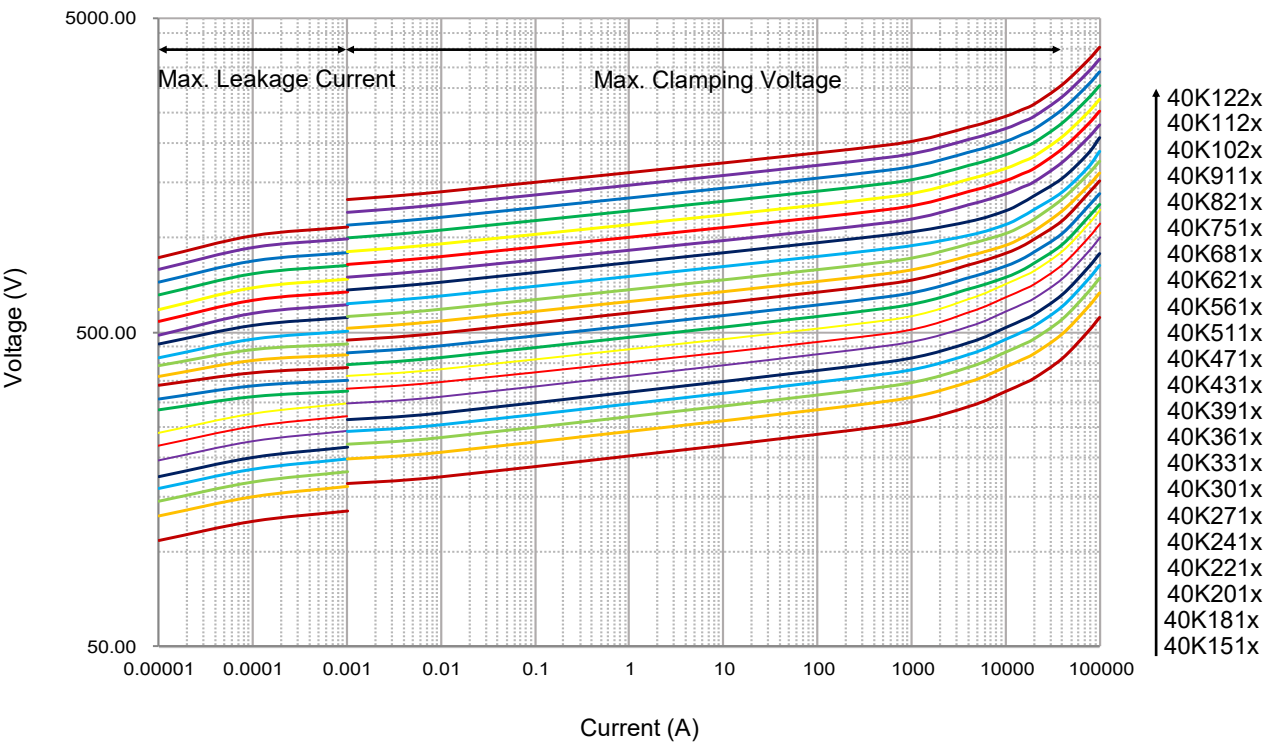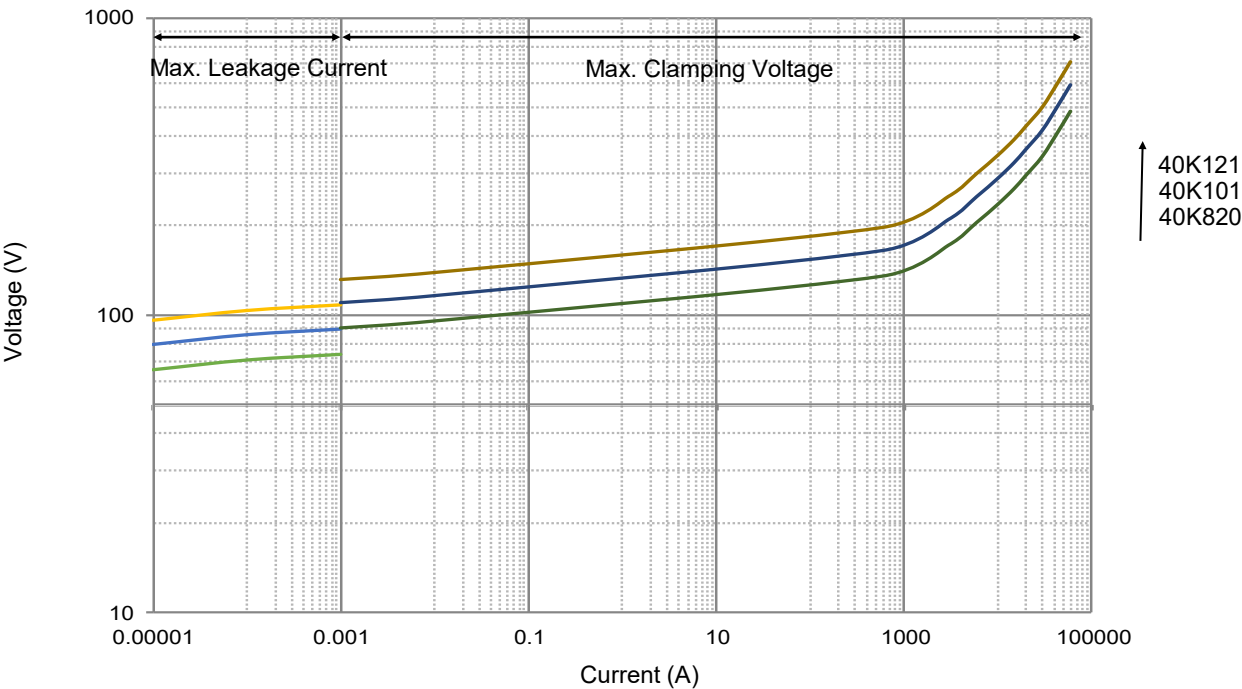


TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

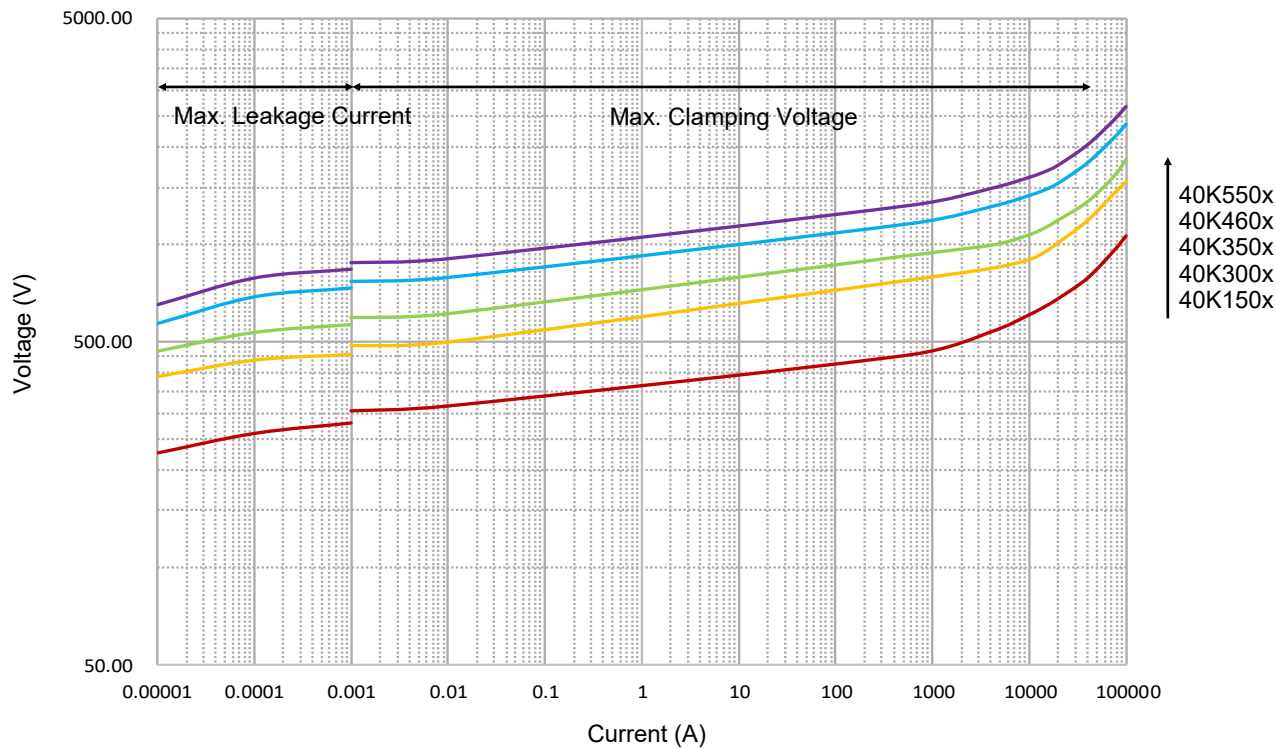

Packaging Information

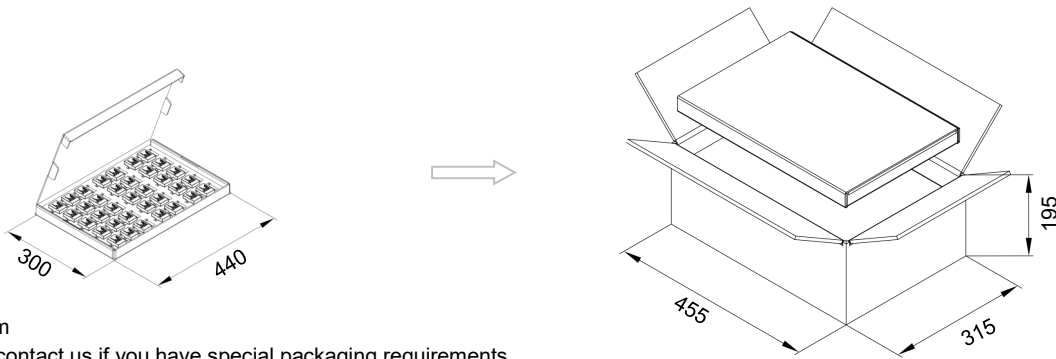

Unit: mm
Please contact us if you have special packaging requirements.


Item	Nominal Varistor Voltage	Box	Carton
Dimensions (mm)	N/A	440 × 300	455 × 315 × 195
Quantity (PCS)	820 ~ 201	50	200
	221 ~ 821	50	150
	911 ~ 122	25	100

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Wave Soldering Parameters (Reference)

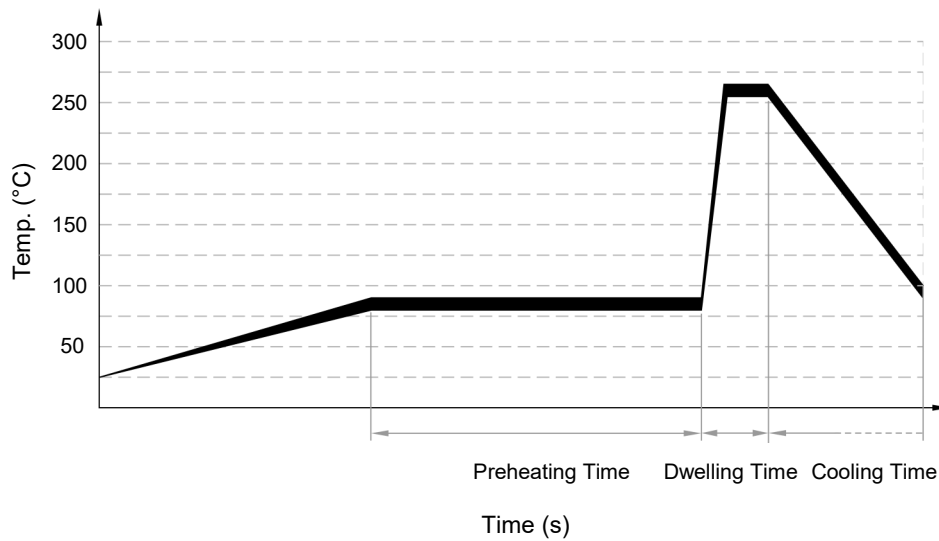

Item	Temp. (°C)	Time (s)
Preheating	80 to 90	60 to 150
Dwelling	250 to 260	2 to 4

Recommended Hand-Soldering Parameters





Item	Condition
Iron Temperature	350 °C (Max.)
Soldering Time	4 seconds (Max.)
Distance between Soldering Point and the Bottom of Product	2 mm (Min.)

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Application Options

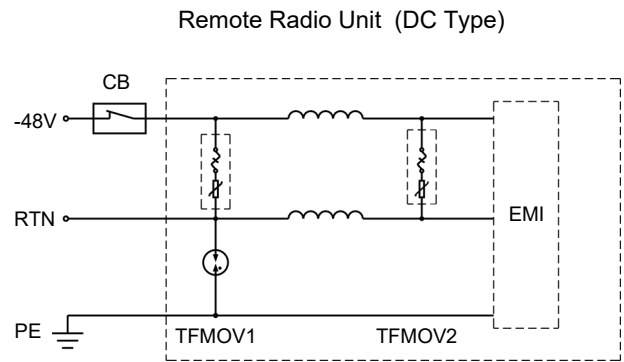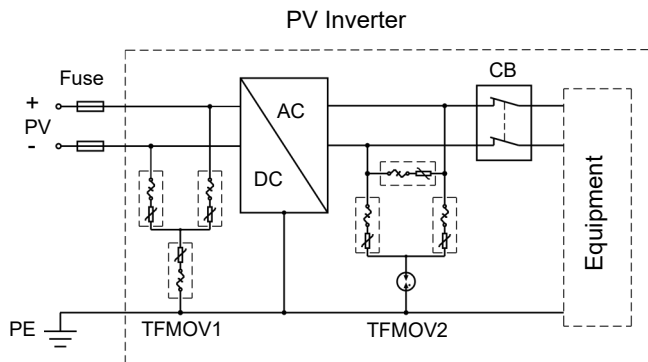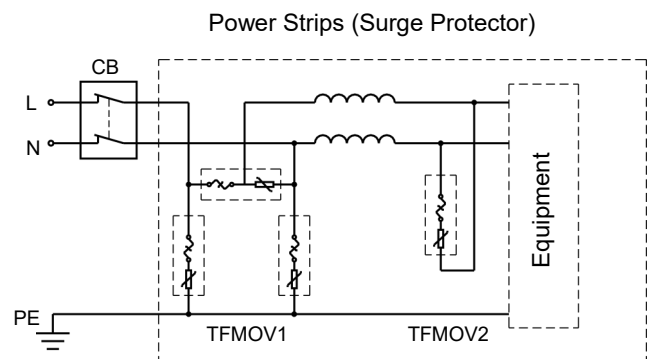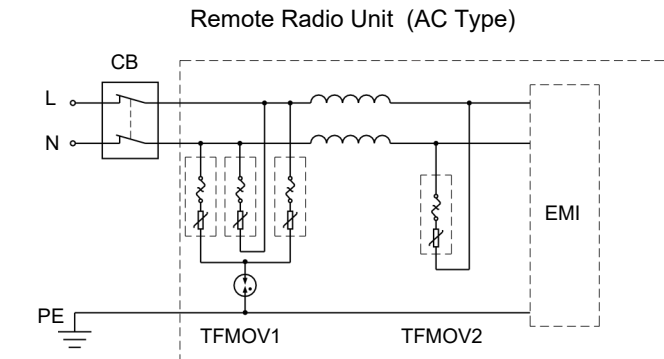

Design

When a single TFMOV surge capacity can't meet the requirement of customers, paralleling more TFMOVs is recommended. Due to its nonlinear current-voltage characteristics, please pay attention to below tips:

1. Use the TFMOV from the same manufacturer with same model to parallel.
2. Control the varistor voltage; Typically, the varistor voltage deviation should be less than 1% in the same group (between the Max and Min), and meet the next tip at the same time.
3. Calculate the average surge capacity for each TFMOV and keep a margin at least 10%.
4. Design the layout like Figure.2. to make sure the surge capacity is divided averagely.

The Design not Recommended

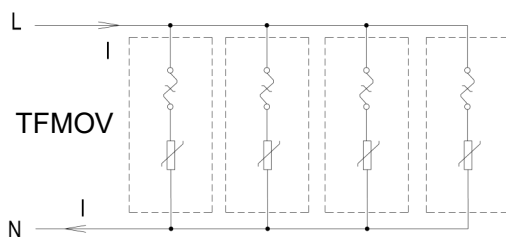


Figure .1

The Design Recommended

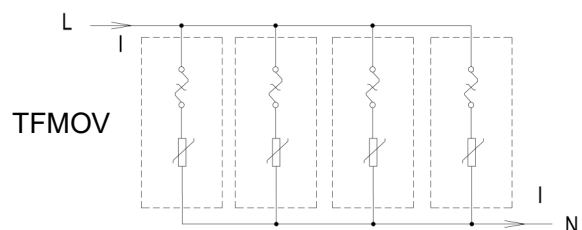



Figure .2

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

MOV Operation Principle

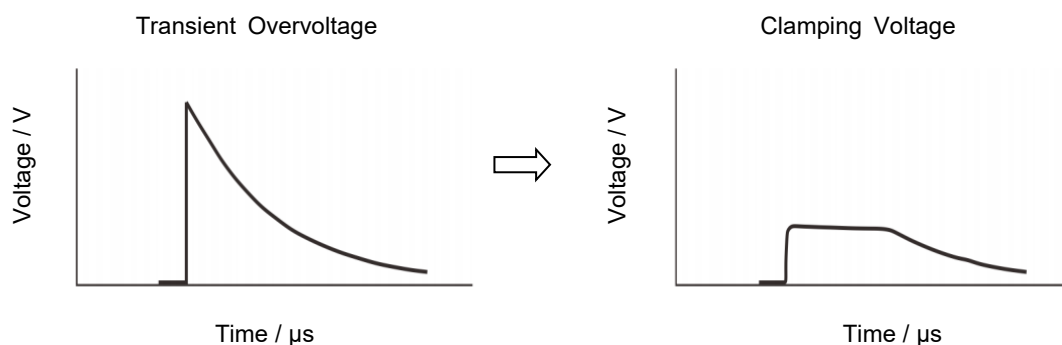

MOV Thermal Protection

Figure a is a surge protection circuit commonly used in power supplies. MOV is used to suppress the surge voltage and protect the subsequent circuit. There is a risk of burning when the varistor degrades or fails. In the high-reliability surge protection circuit of Figure b, in order to improve the safety of the circuit, a thermal protection varistor TFMOV is used as the surge voltage protection element. TFMOV is a combination of varistors (MOV) and thermal protection component. When the temperature of the MOV is abnormally exceeded, the thermal fuse will be opened first, so that the failure mode of the MOV appears to be open-circuit failure.

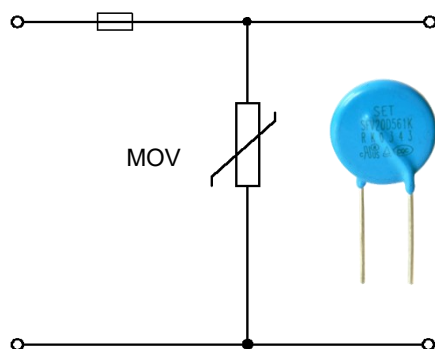


Figure a Typical surge protection circuit

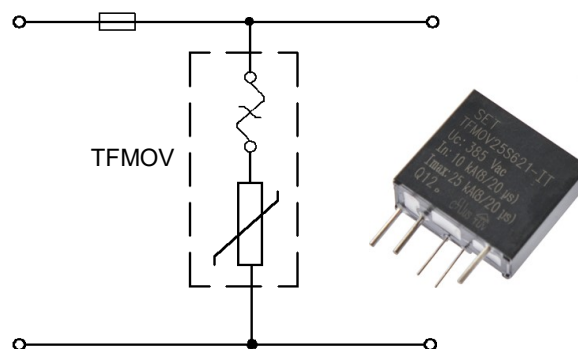



Figure b: High reliability surge protection circuit

TFMOV


Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Benefits



Safety

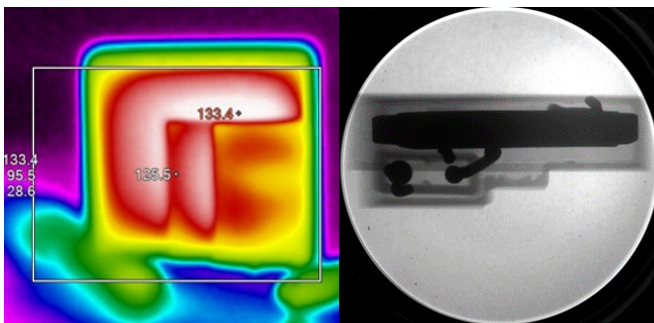


TFMOV Failure Simulation


During the electrical performance degrading of varistor, the inbuilt ATCO will open the circuit when the leakage current of varistor increases to tens of micro Amperes. As shown in the figure above, this is a safe open circuit failure.



Hidden Danger



Hole in Varistor



MOV Failure Simulation

The electrical performance of varistor degrades with operating, mostly the varistor voltage drops, and leakage current increases. The heat accumulation can cause the temperature increase sharply and varistor results in thermal breakdown to short circuit status. It's very dangerous.

Glossary

Item	Description
V_N	Nominal Varistor Voltage Voltage, at specified d.c. current used as a reference point in the component characteristic.
8/20 μ s	8/20 Current Impulse Current impulse with a nominal virtual front time of 8 μ s and a nominal time to half-value of 20 μ s. — (IEC 61643-11)
1.2/50 μ s	1.2/50 Voltage Impulse Voltage impulse with a nominal virtual front time of 1.2 μ s and a nominal time to half-value of 50 μ s. — (IEC 61643-11)
U_c	Maximum Continuous Operating Voltage Maximum r.m.s. voltage, which may be continuously applied to the SPD's mode of protection. — (IEC 61643-11)
I_n	Nominal Discharge Current Crest value of the current through the SPD having a current waveshape of 8/20 μ s. — (IEC 61643-11)
I_{imp}	Impulse Discharge Current for Class I Test Crest value of a discharge current through the SPD with specified charge transfer Q and specified energy W/R in the specified time. — (IEC 61643-11)
I_{max}	Maximum Discharge Current Crest value of a current through the SPD having an 8/20 μ s waveshape and magnitude according to the manufacturers specification. I_{max} is equal to or greater than I_n . — (IEC 61643-11)
V_c	Clamping Voltage Peak voltage developed across the varistor terminations under standard atmospheric conditions, when passing an 8/20 μ s class current pulse.
C_v	Capacitance Capacitance across the MOV measured at a specified frequency and voltage.
Modes of protection	Modes of protection An intended current path, between terminals that contains protective components, e.g. line-to-line, line-to-earth, line-to-neutral, neutral-to-earth. — (IEC 61643-11)
U_p	Voltage Protection Level Maximum voltage to be expected at the SPD terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and wave shape. — (IEC 61643-11)
TCO	Thermal-Link A non-resettable device incorporating a THERMAL ELEMENT which will open a circuit once only when exposed for a sufficient length of time to a temperature in excess of that for which it has been designed.
ATCO	Alloy Thermal-Link Alloy Type Thermal-Link, Alloy is the thermal element.
MOV	Varistors A resistive device with nonlinear voltammetry characteristics

TFMOV

Thermal Fuse & MOV (TFMOV)

TFMOV40K Series

Patents

Name	Region	Category	Patent NO.
Varistor with In-built Alloy-Type Thermal Fuse	China	Patent for Invention	ZL 200510044661.5
A Protection Pluggable Module with Over Current、Over Voltage、and Over Temperature Protection Function	China	Utility Model	ZL 201020244488.X
A Varistor with Double Protection Function	China	Utility Model	ZL 201020255481.8
Surge Protection Module Applicable for Power Strip	China	Utility Model	ZL 201120107173.5
A Surge Protection Module Applicable for Power Strip	China	Patent for Invention	ZL 201110092261.7
A New Type of Varistor and Surge Protective Device with Thermal Protection	China	Utility Mode	ZL 201420306127.1
A Surge Protective Device	China	Utility Modeel	ZL 201420415059.2
A Varistor and Thermal Protection Component Combination	China	Utility Mode	ZL 201520376567.9
合金型温度ヒューズ付のバリスタ	Japan	Utility Mode	3142835
Varistor with an Alloy-Type Temperature Fuse	Australia	Utility Mode	2007100456
Varistor with an Alloy-Type Temperature Fuse	Taiwan	Utility Model	M 300855
Varistor with an Alloy-type Temperature Fuse	Canada	Patent for Invention	2588819
Metal Oxide Varistor with Built-in Alloy-Type Temperature Fuse	USA	Patent for Invention	US 8780521
Varistor with In-built Alloy Type Thermal Fuse (with Housing)	USA	Patent for Invention	US 9355763



ATTENTION

Usage

1. Frequency range is from 47 Hz to 63 Hz.
2. The voltage applied continuously to the TFMOV can not exceed its maximum continuous operating voltage U_c .
3. When atmosphere press is from 80 kPa to 106 kPa, the related altitude shall be from 2000 meters to - 500 meters.
4. Do not touch the product body or pins directly when power is on, to avoid electric shock.
5. Do not clean the TFMOV with strong polar solvent such as ketone, esters, benzene, halogenated hydrocarbon, to avoid damaging the enclosure.
6. It should have a reliable grounding when using these products.

Replacement

TFMOV is a non-repairable product. For safety sake, please use equivalent TFMOV for replacement.

Storage

Do not store TFMOV at high temperature, high humidity or corrosive gas environment. To avoid reducing the solderability of the pins, please use them up within 1 year after receiving the goods.

Installation Position

Do not install the TFMOV on a place that may often suffer severe continuous vibration.

Mechanical Stress

Do not take violent action such as knocking when assembling to avoid mechanical damage.

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)													Maximum Continuous Operating Voltage U_n (V)		Model
													AC	DC	
690V	600V		○	○	○	○	○	○	○	○	○	○	750	1000	
			○	○	○	○	○	○	○	○	○	○	680	895	
480V			○	○	○	○	○	○	○	○	○	○	625	825	
	400V		○	○	○	○	TFMOV10S821	○	○	TFMOV15S821	○	○	510	670	
347V			○	○	○	○	TFMOV10S751	○	○	TFMOV15S751	○	○	460	615	
	254		○	○	○	○	TFMOV10S681	○	○	TFMOV15S681	○	○	420	560	
	-		○	○	○	○	TFMOV10S621	○	○	TFMOV15S621	○	○	385	505	
220	277V		○	○	○	○	TFMOV10S561	○	○	TFMOV15S561	○	○	350	460	
			○	○	○	○	TFMOV10S511	○	○	TFMOV15S511	○	○	320	415	
230V		300V	○	○	○	○	TFMOV10S471	○	○	TFMOV15S471	○	○	300	385	
			○	○	○	○	TFMOV10S431	○	○	TFMOV15S431	○	○	275	350	
			○	○	○	○	TFMOV10S391	○	○	TFMOV15S391	○	○	250	320	
	120	220V	○	○	○	○	TFMOV10S361	○	○	TFMOV15S361	○	○	230	300	
	-		○	○	○	○	TFMOV10S331	○	○	TFMOV15S331	○	○	210	275	
	130V		○	○	○	○	TFMOV10S301	○	○	TFMOV15S301	○	○	190	250	
			○	○	○	○	TFMOV10S271	○	○	TFMOV15S271	○	○	175	225	
		110V	○	○	○	○	TFMOV10S241	○	○	TFMOV15S241	○	○	150	200	
110V			○	○	○	○	TFMOV10S221	○	○	TFMOV15S221	○	○	140	180	
			○	○	○	○	TFMOV10S201	○	○	TFMOV15S201	○	○	130	170	
			○	○	○	○	TFMOV10S181	○	TFMOV20S181Lx	TFMOV15S181	TFMOV20S181	○	115	150	
	60V	60V	○	○	○	TFMOV20S680Lx	TFMOV10S151	○	TFMOV20S151Lx	TFMOV15S151	TFMOV20S151	○	95	125	
48V			○	TFMOV10S121	TFMOV15S121	TFMOV20S560Lx	○	○	TFMOV20S121Lx	○	TFMOV20S121x	○	75	100	
	48V		○	TFMOV10S101	TFMOV15S101	TFMOV20S470Lx	○	○	TFMOV20S101Lx	○	TFMOV20S101x	○	60	85	
	36V		○	TFMOV10S820	TFMOV15S820	○	○	○	TFMOV20S820Lx	○	TFMOV20S820x	○	50	65	
			TFMOV10S680	TFMOV15S680	TFMOV20S680x	○	TFMOV25D680x	○	○	○	TFMOV25S680x	TFMOV25S680Lx	40	56	
24V		24V	TFMOV10S560	TFMOV15S560	TFMOV20S560x	○	TFMOV25D560x	○	○	○	TFMOV25S560x	TFMOV25S560Lx	35	45	
			TFMOV10S470	TFMOV15S470	TFMOV20S470x	○	○	TFMOV25S470Lx	○	○	○	○	30	38	
			TFMOV10S390	TFMOV15S390	○	○	○	○	○	○	○	○	25	31	
12V		12V	TFMOV10S330	TFMOV15S330	○	○	○	○	○	○	○	○	20	26	
			TFMOV10S270	TFMOV15S270	○	○	○	○	○	○	○	○	17	22	
AC													AC	DC	
DC															
			1	1.5	2.5	3	4	5							

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

[illegible]

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)											Maximum Continuous Operating Voltage U_n (V)		Model		
											AC	DC			
690V	600V		○	TFMOV20K122x	○	TFMOV34S122x	○	○	TFMOV40K122x	○	750	1000			
			○	TFMOV20K112x	○	TFMOV34S112x	○	○	TFMOV40K112x	○	680	895			
480V	400V		○	TFMOV20K102x	○	TFMOV34S102x	○	○	TFMOV40K102x		625	825			
			○	TFMOV20K911x	TFMOV20K550x	TFMOV34S911x	○	○	TFMOV40K911x	TFMOV40K550x	550	745			
347V	254 - 277V		○	TFMOV20K821x	○	TFMOV34S821x	○	○	TFMOV40K821x	○	510	670			
			○	TFMOV20K751x	TFMOV20K460x	TFMOV34S751x	○	○	TFMOV40K751x	TFMOV40K460x	460	615			
220 - 230V	300V		○	TFMOV20K681x	○	TFMOV34S681x	TFMOV34S681Lx	○	TFMOV40K681x	○	420	560			
			○	TFMOV20K621x	○	TFMOV34S621x	TFMOV34S621Lx	○	TFMOV40K621x	○	385	505			
120 - 130V	220V		○	TFMOV20K561x	TFMOV20K350x	TFMOV34S561x	TFMOV34S561Lx	○	TFMOV40K561x	TFMOV40K350x	350	460			
			○	TFMOV20K511x	○	TFMOV34S511x	TFMOV34S511Lx	○	TFMOV40K511x	○	320	415			
110V	110V		○	TFMOV20K471x	○	TFMOV34S471x	TFMOV34S471Lx	○	TFMOV40K471x	○	300	385			
			○	TFMOV20K431x	TFMOV20K300x	TFMOV34S431x	TFMOV34S431Lx	○	TFMOV40K431x	TFMOV40K300x	275	350			
60V	60V		○	TFMOV20K391x	○	TFMOV34S391x	TFMOV34S391Lx	○	TFMOV40K391x	○	250	320			
			○	TFMOV20K361x	○	TFMOV34S361x	TFMOV34S361Lx	○	TFMOV40K361x	○	230	300			
48V	48V		○	TFMOV20K331x	○	TFMOV34S331x	TFMOV34S331Lx	○	TFMOV40K331x	○	210	275			
			○	TFMOV20K301x	○	TFMOV34S301x	TFMOV34S301Lx	○	TFMOV40K301x	○	190	250			
36V	36V		○	TFMOV20K271x	○	TFMOV34S271x	TFMOV34S271Lx	○	TFMOV40K271x	○	175	225			
			○	TFMOV20K241x	TFMOV20K150x	TFMOV34S241x	TFMOV34S241Lx	○	TFMOV40K241x	TFMOV40K150x	150	200			
24V	24V		○	TFMOV20K221x	○	TFMOV34S221x	TFMOV34S221Lx	○	TFMOV40K221x	○	140	180			
			○	TFMOV20K201x	○	TFMOV34S201x	TFMOV34S201Lx	○	TFMOV40K201x	○	130	170			
12V	12V		○	○	○	TFMOV34S181x	TFMOV34S181Lx	○	TFMOV40K181x	○	115	150			
			○	○	○	TFMOV34S151x	TFMOV34S151Lx	○	○	○	95	125			
			TFMOV34S121Lx	○	○	○	○	○	○	○	75	100			
			TFMOV34S101Lx	○	○	○	○	TFMOV40K121x	○	○	60	85			
			TFMOV34S820Lx	○	○	○	○	TFMOV40K101x	○	○	50	65			
			○	○	○	○	○	TFMOV40K820x	○	○	40	56			
			○	○	○	○	○	○	○	○	35	45			
			○	○	○	○	○	○	○	○	30	38			
			○	○	○	○	○	○	○	○	25	31			
			○	○	○	○	○	○	○	○	20	26			
			○	○	○	○	○	○	○	○	17	22			
			○	○	○	○	○	○	○	○	17	22			
AC	DC	15	$I_{\max} = 2.5 I_n$								20	30	40	AC	DC
Nominal Discharge Current I_n (kA)															

Thermal Fuse & MOV (TFMOV) Feature & Model List Overview

Rated Voltage U_n (V)								Maximum Continuous Operating Voltage U_n (V)		Model
								AC	DC	
690V	600V	○	○	○	○	○	○	750	1000	
		○	○	○	○	○	○	680	895	
480V		○	○	○	○	○	○	625	825	
	400V	○	○	○	○	○	○	550	745	
347V		○	○	○	○	○	○	510	670	
		○	○	○	○	○	○	460	615	
	254	○	○	○	○	○	○	420	560	
220	277V	○	○	○	○	○	○	385	505	
		○	○		○	○	○	350	460	
230V	300V	○	○	TFMOV21R2P511	○	○	TFMOV21R3P511	320	415	
		○	○	TFMOV21R2P471	○	○	TFMOV21R3P471	300	385	
		○	○	TFMOV21R2P431	○	○	TFMOV21R3P431	275	350	
		○	○	TFMOV21R2P391	○	○	TFMOV21R3P391	250	320	
120	220V	○	○	TFMOV21R2P361	○	○	TFMOV21R3P361	230	300	
	130V	○	○	TFMOV21R2P331	○	○	TFMOV21R3P331	210	275	
		○	○	TFMOV21R2P301	○	○	TFMOV21R3P301	190	250	
		○	○	TFMOV21R2P271	○	○	TFMOV21R3P271	175	225	
110V	110V	○	○	TFMOV21R2P241	○	○	TFMOV21R3P241	150	200	
		○	○	TFMOV21R2P221	○	○	TFMOV21R3P221	140	180	
		○	○	TFMOV21R2P201	○	○	TFMOV21R3P201	130	170	
		○	TFMOV21R2P181	○	○	TFMOV21R3P181	○	115	150	
	60V	○	TFMOV21R2P151	○	○	TFMOV21R3P151	○	95	125	
48V	60V	○	TFMOV21R2P121	○	○	TFMOV21R3P121	○	75	100	
	48V	○	TFMOV21R2P101	○	○	TFMOV21R3P101	○	60	85	
	36V	○	TFMOV21R2P820	○	○	TFMOV21R3P820	○	50	65	
		TFMOV21R2P680	○	○	TFMOV21R3P680	○	○	40	56	
24V	24V	TFMOV21R2P560	○	○	TFMOV21R3P560	○	○	35	45	
		TFMOV21R2P470	○	○	TFMOV21R3P470	○	○	30	38	
		○	○	○	○	○	○	25	31	
12V	12V	○	○	○	○	○	○	20	26	
		○	○	○	○	○	○	17	22	
AC	DC	2.5 x 2	5 x 2	7.5 x 2	2.5 x 3	5 x 3	7.5 x 3	AC	DC	
		Nominal Discharge Current I_n (kA)								